


MPS-8Z y VAP-1

The MPS-8Z microphonic station and the VAP-1 emergency panel have a series of functionalities activated by their corresponding keyboards. This quick guide is intended to serve as a summary of the functions described in the user's manual of the devices. For more information, please find it in our [LDA Support Website](https://support.lda-audiotech.com/):

1 MPS-8Z:

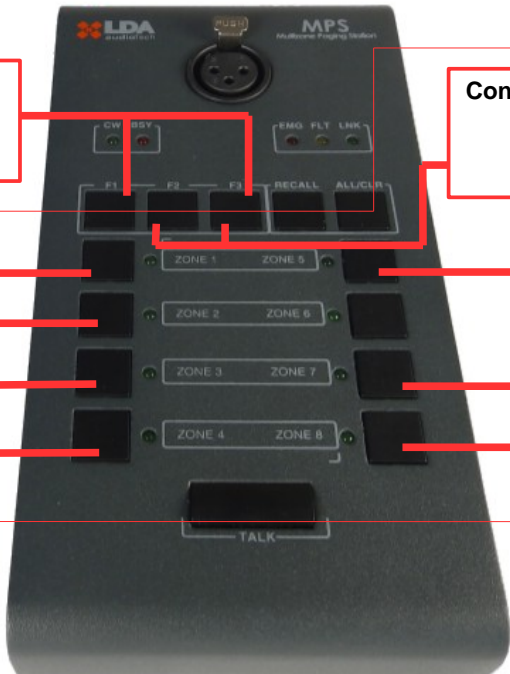

ACSI Bus address =
(MEM + CANCEL) Hold 3 sec. → N° zone button

Configurations = (EVENT + CANCEL)
Hold 03 sec.
→ N° zone button
→ TALK (confirm changes)

Button 1: Latch (To block the Talk button)

Button 5: Keyboard Auto-Lock

Button 2: Message alert tone

Lock / Unlock = CANCEL + TALK


Button 3: External microphone Input.

Button 7: Increase volume

Button 4: DSA (Dynamic Adjustment of Sound)

Button 8: Decrease volume

2 VAP-1:



ACSI Bus address =
(RESET + ACK)
Hold 3 sec, →

EVAC = Increase address
ALERT = Decrease address
ACK = Confirm
RESET = Cancel

Address LED combination:

1 → EMIC	5 → EMIC + EMIC
2 → PWR	6 → EMIC + PWR
3 → LINK	7 → EMIC + LINK
4 → FAULT	8 → EMIC + FAULT

Configuration = (ALERT + EVAC)
Hold 3 sec. →

TEST = Warning tone active
EVAC = Increase volume
ALERT = Decrease volume