




## 1 WALL MOUNT

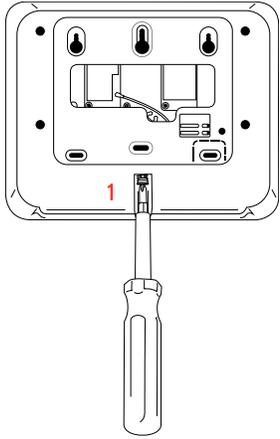


1. With a small phillips screwdriver, undo the locking screw from the back of the panel and remove the SmartMount backplate.



1. Mount the backplate to the wall using flat head screws\* and appropriate wall anchors if needed, ensuring it is level.
2. A screw is required in break-away wall tamper for UL 2610 and EN Grade 2 installations.
3. Connect the power supply to the barrel jack on the back of the panel.




1. Latch the top of the IQ4 Hub onto the SmartMount backplate.
2. Swing the panel down towards the backplate and press firmly against the wall.

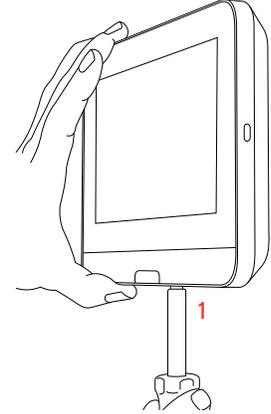

1. With a small phillips screwdriver, screw in the locking screw from the bottom of the panel to secure it to the wall.

## 2

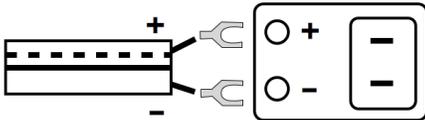

Connect power supply  
**WARNING! Use 7vDC Power Supply ONLY**

## 3



Press and hold the power button on the right side of the panel for 3 seconds to power up

## 4

CREATE POWERMANAGE ACCOUNT:



ALARM INSTALL




CONNECT ALARM

## 5 ON SCREEN SETUP WIZARD (Auto Launch)

Once the panel powers up the on-screen wizard will automatically appear.

Follow the prompts to complete your installation.

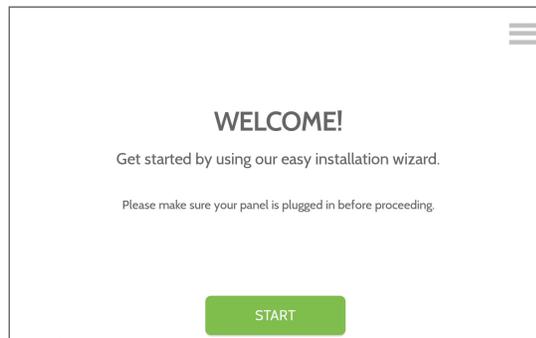

## SETUP WIZARD (Manual Launch)



Tap to access settings tray



Settings



Advanced  
(default installer password is 1111)



Setup Wizard  
(Launch Wizard)