


2-circuit Z-Wave™ smart switch with power measurement

The Wave 2 PM turns ordinary two-pole wall switch into a smart switch. It enables remote control of two electrical devices, such as lights, ceiling fans, IR panels, and IR heaters. It switches (on/off) two independent loads and measures their power consumption separately and in total. Connected devices can be controlled either via smartphone/tablet, according to schedules or scenes, etc. It is compatible with switches or push-buttons.

ADVANTAGES

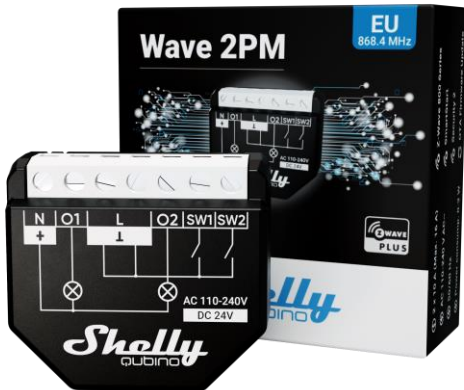

- **2x 10 A (16 A total).**
- **Measures power consumption** of the connected devices on each channel and together.
- Latest technology: **Z-Wave 800 Series.**
- **Extended wireless range** – up to 40 m indoors.
- **Small size** ensures the simplest installation behind every wall switch or wall socket.
- **SmartStart** for the automatic set-up.
- **OTA Firmware update** for over-the-air updates.
- **Security Vault™** ensures the **highest level of security** with features, such as secure boot, secure key management, secure debug, and more.
- **Security 2 Authenticated.**
- Extremely **low energy consumption**: less than 0.3 W.
- Works with **Z-Wave certified hubs** and **over 4000 Z-Wave devices.**

TECHNICAL SPECIFICATIONS

Power supply	110-240 V AC / 24 V DC +/-10%
Power consumption	< 0.3 W
Power measurement (W)	Yes
Max switching voltage AC	240 V
Max switching current AC	10 A per channel, 16 A total, 18 A total peak
Max switching voltage DC	30 V
Max switching current DC	10 A
Overheating protection	Yes
Overload protection	Yes
Distance	up to 40 m indoors (131 ft.) (depends on local condition)
Z-Wave™ repeater:	Yes
CPU	Z-Wave™ S800
Z-Wave™ frequency band(s)	868,4 MHz
Maximum radio frequency power transmitted in frequency band(s)	< 25 mW
Size (H x W x D)	37 x 42 x 16 ± 0.5 mm / 1.46 x 1.65 x 0.63 ± 0.02 in
Mounting	Wall console
Screw terminals max torque	0.4 Nm / 3.5 lbin
Conductor cross section	0.5 to 1.5 mm² / 20 to 16 AWG
Conductor stripped length	5 to 6 mm / 0.20 to 0.24 in
Shell material	Plastic
Color	Black
Ambient temperature	-20°C to 40°C / -5°F to 105°F
Humidity	30% to 70% RH
Max. altitude	2000 m / 6562 ft.

WIRING DIAGRAMS

